LockJaw®

SYNTHETIC NON-LIFTING SHACKLE

- Infinite opening for hard-to-reach anchor points
- Works in the most challenging & tight spaces
- No rust, no freeze—built for harsh environments
- Patented locking system — no loose pins, stays securely closed
- Proudly made in the USA



LockJaw® Synthetic Shackles vs Traditional Metal Shackles



LockJaw® Synthetic Soft Shackles are a direct replacement for traditional steel screw- pin shackles, offering higher strength at a fraction of the weight. Its flexible design allows infinite opening and access to tight or complex spaces, making it a critical addition to recovery setups. The synthetic fibers are UV-resistant, freeze-proof, and rust-proof. The permanently attached lock eliminates lost pins and ensures secure closure during use. LockJaw wraps easily around a wide range of anchor points. Patented. Made in USA.

- Flexible shape fits tight/irregular anchor points
- Designed for rapid deployment/easy handling
- Capabilities 3,000 - 33,333 lbs. WLL
- Aircraft-grade aluminum jaw
- Weather & UV-resistant finish

BUILT FOR RECOVERY, TOWING, TRANSPORTATION & MORE








Manufactured by Fusion Tools, Inc. SPARTA, TN 38583


www.fusion-tools.com | 615-969-2825

PRODUCT SPECS

This product is designed exclusively for towing, off- road, and vehicle recovery applications. It is **not certified for lifting, hoisting, or rigging**. All lifting and overhead load- bearing operations require the use of a **LockJaw™ Synthetic Lifting- Rated Shackle**, which meets the appropriate performance and safety standards for lifting equipment.

Item #	Working Load Limit (lb)	Break Strength (lb)	Weight Each (lb)	Working Diameter (in)	Bow Length (in)	Nominal Chain Size	Dimensions (in.)				Tolerance +/-	
							A	B	C	D	A	B
15-018804	3,000	9,000	0.2	2.5	4	3/16"	0.19	0.63	4	1.75	0.005	0.005
15-018808	3,000	9,000	0.25	4	8	3/16"	0.19	0.63	8	1.75	0.005	0.005
15-025004	5,500	16,500	0.25	2.5	4	1/4"	0.25	0.75	4	2.1	0.005	0.005
15-025008	5,500	16,500	0.3	4	8	1/4"	0.25	0.75	8	2.1	0.005	0.005
15-031305	8,800	26,400	0.3	3	5	5/16"	0.31	1.00	5	22	0.005	0.005
15-031310	8,800	26,400	0.4	6	10	5/16"	0.31	1.00	10	22	0.005	0.005
15-037505	11,200	33,600	0.4	3	5	3/8"	0.38	1.13	5	2.6	0.005	0.005
15-037510	11,200	33,600	0.5	6	10	3/8"	0.38	1.13	10	2.6	0.005	0.005
15-043805	14,333	43,000	0.5	3	5	7/16"	0.44	1.25	5	3.1	0.005	0.005
15-043810	14,333	43,000	0.6	6	10	7/16'	0.44	1.25	10	3.1	0.005	0.005
15-050006	20,000	60,000	1	3.5	6	1/2"	0.5	1.5	6	3.5	0.005	0.005
15-050012	20,000	60,000	1	7	12	1/2"	0.5	1.5	12	3.5	0.005	0.005
15-056306	26,666	79,998	1.4	3.5	6	9/16"	0.56	1.75	6	3.9	0.005	0.005
15-056312	26,666	79,998	1.6	7	12	9/16"	0.56	1.75	12	3.9	0.005	0.005
15-062507	33,333	99,999	1.75	4	7	5/8"	0.63	2	7	4.4	0.005	0.005
15-062514	33,333	99,999	2	8	14	5/8"	0.63	2	14	4.4	0.005	0.005

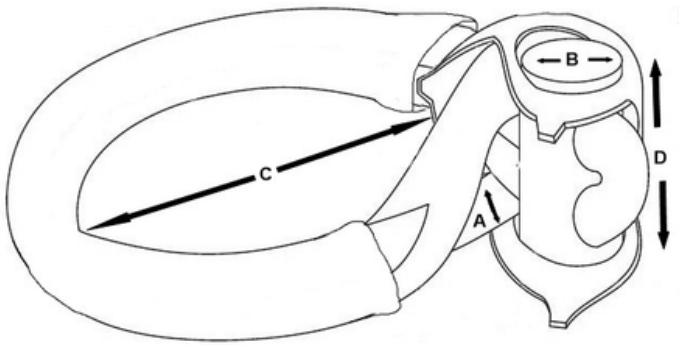

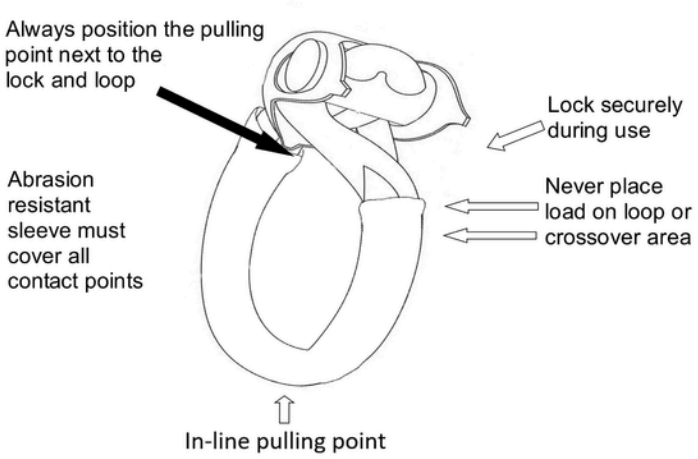

FOR USE WITH:



Winch Ropes & Extensions



Recovery & Tow Ropes



Winch Anchors



Recovery Rings